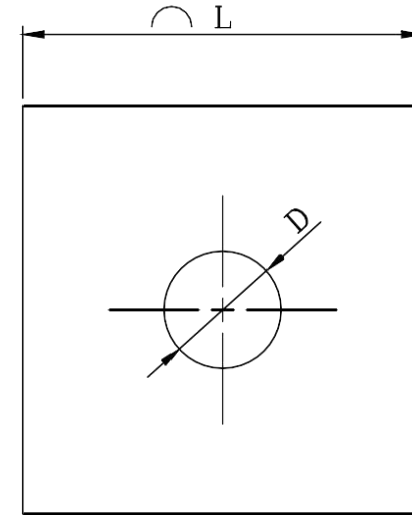
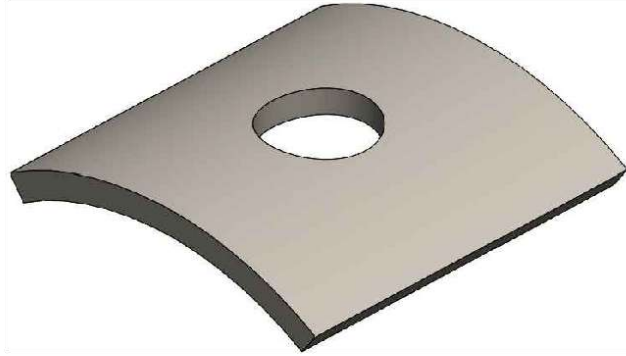
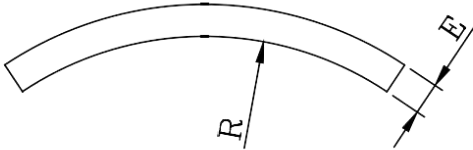


D1AR0018	4"	3/16"	21	120	55 KN	Acero ASTM A-36	0.406									
D1AR0024			18				0.406									
D1AR0019		1/4"	21	120	77 KN		0.487									
D1AR0017			18				0.487									
D1AR0011	3"	3/16"	21	120	55 KN	Acero ASTM A-36	0.227									
D1AR0012			18				0.227									
D1AR0009		1/4"	21	120	77 KN		0.272									
D1AR0010			18				0.272									
D1AR0003	2"	3/16"	18	120	55 KN	Acero ASTM A-36	0.102				NORMA DE FABRICACION: UNE					
D1AR0001		1/4"	21		77 KN		0.123				OBS: Medidas de acuerdo a requerimiento					
D1AR0023			18		0.123		ACABADO				Galvanizado en caliente ASTM A-153					
D1AR0026	2 1/2"	3/16"	21	120	55 KN	Acero ASTM A-36	0.158									
D1AR0008			18				0.158									
D1AR0006	2 1/4"	3/16"	21	120	55 KN	Acero ASTM A-36	0.128							FECHA:	ARANDELA CUADRADA CURVA DE F°G°	LAMINA N°:
D1AR0007			18				0.128							23/02/19		02-A-PC
CODIGO	L	E	D	R	ESFUERZO AL CORTE	ACABADO DEL MATERIAL	PESO APROX (Kg)	ESCALA: S/E		DIBUJADO POR: J.P						
	DIMENSIONES (mm)															