


REVISIONS			
REV #	DESCRIPTION	APPV.	REV DATE
1	PRINTING DETAIL CHANGED & MARKING DETAIL REMOVED FROM TABLE	NT	09/04/2011
2	DIMENSIONS CHANGED	NT	30/05/2011
3	ITEM CODE ADTL230012V1 & ADTL230012V2 REMOVED ITEM CODE ADTL230012 DIM. (L, L1, ØW & S) REVISED	NT	21/03/2017
4	ITEM CODE ADTL215014 AND ADTL21606 ADDED	NT	14/02/2022




NOTE

- 1) ALL DIMENSIONS ARE IN mm UNLESS OTHERWISE SPECIFIED
- 2) MATERIAL : COPPER PALM :- EC GRADE FORGED COPPER (COPPER PURITY 99.9%) & BARREL :- AL - EC GRADE ALUMINIUM ROD AS PER IS 5082:98 GR. 19501
- 3) FINISH : NATURAL AND DEGREASED
- 4) WELDING PROCESS : HIGH SPEED FRICTION WELDING
- 5) ALUMINIUM BARREL FILLED WITH OXIDE INHABITING COMPOUND AND SEALED BY PLASTIC CAP
- 6) TOLERANCE : $\pm 5\%$

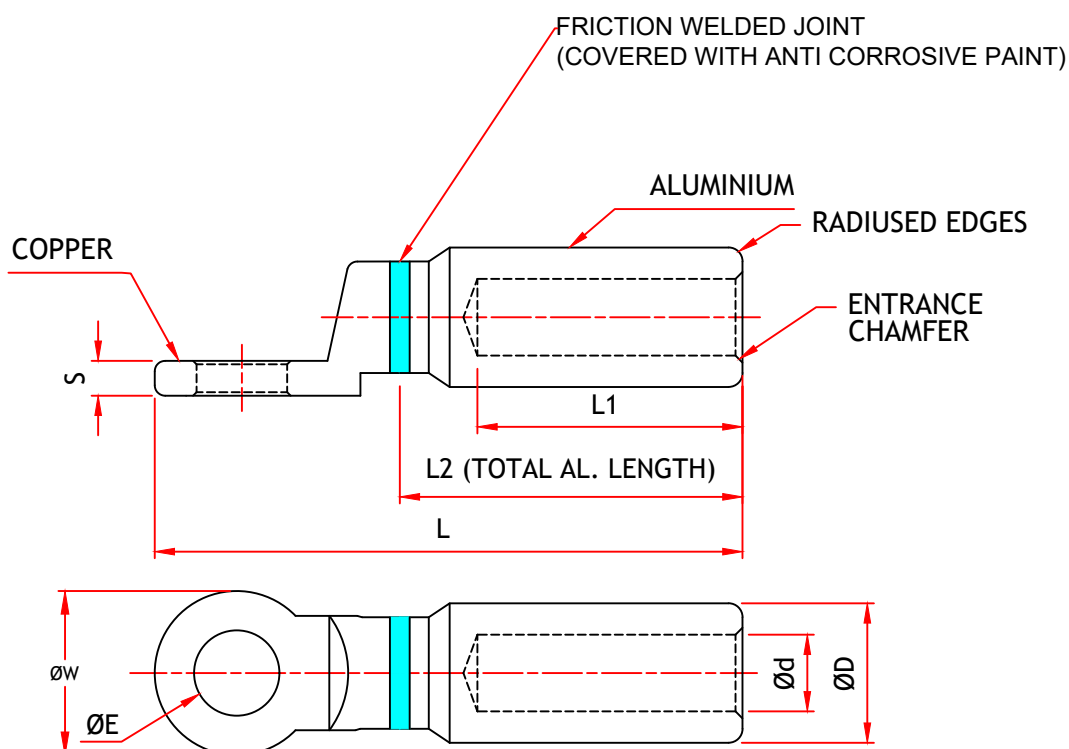

AXIS ELECTRICAL COMPONENTS (I) P. LTD.
MUMBAI - 400067, INDIA.
TEL : 91-22-67756000
e-mail : marketing@axis-india.com



MATERIAL :
REF NOTE

DRAWN: SA
CHECKED: AG
APPROVED: KP
ISSUE DT: 18/03/11
SCALE: N.T.S.

DRG No: 2452-2011R4 C

TITLE :

**BIMETALLIC LUG
(DTL SERIES)**



CORPELIMA
Importadores y Líderes en Soluciones Eléctricas

REVISIONS			
REV #	DESCRIPTION	APPV.	REV DATE
1	PRINTING DETAIL CHANGED & MARKING DETAIL REMOVED FROM TABLE	NT	09/04/2011
2	DIMENSIONS CHANGED	NT	30/05/2011
3	ITEM CODE ADTL230012V1 & ADTL230012V2 REMOVED ITEM CODE ADTL230012 DIM. (L, L1, ØW & S) REVISED	NT	21/03/2017
4	ITEM CODE ADTL215014 AND ADTL21606 ADDED	NT	14/02/2022


CABLE SIZE mm2	ØE	ØD	Ød	L	L1	L2	ØW	S	ITEM CODE
16	6.5	16	5.5	90	47	55	24	4	ADTL21606
16	8.5	16	5.5	90	47	55	24	4	ADTL21608
16	10.5	16	5.5	90	47	55	24	4	ADTL21610
16	13	16	5.5	90	47	55	24	4	ADTL21612
25	8.5	16	6.5	90	47	55	24	4	ADTL22508
25	10.5	16	6.5	90	47	55	24	4	ADTL22510
25	13	16	6.5	90	47	55	24	4	ADTL22512
35	8.5	16	8.5	90	47	55	24	4	ADTL23508
35	10.5	16	8.5	90	47	55	24	4	ADTL23510
35	13	16	8.5	90	47	55	24	4	ADTL23512
50	10.5	20	9.5	98	50	57	24	5	ADTL25010
50	13	20	9.5	98	50	57	24	5	ADTL25012
70	8.5	20	11	98	50	57	24	5	ADTL27008
70	10.5	20	11	98	50	57	24	5	ADTL27010
70	13	20	11	98	50	57	24	5	ADTL27012
95	8.5	20	12.5	98	50	57	24	5	ADTL29508
95	10.5	20	12.5	98	50	57	24	5	ADTL29510
95	13	20	12.5	98	50	57	24	5	ADTL29512
95	14.5	20	12.5	98	50	57	24	5	ADTL29514
120	10.5	25	15	117	60	70	30	6	ADTL212010
120	13	25	15	117	60	70	30	6	ADTL212012
120	17	25	15	124	60	70	35	6.5	ADTL212016
150	10.5	25	16	117	60	70	30	6	ADTL215010
150	13	25	16	117	60	70	30	6	ADTL215012
150	14.5	25	16	117	60	70	30	6	ADTL215014
150	17	25	16	124	60	70	35	6.5	ADTL215016
150	21	25	16	124	60	70	35	6.5	ADTL215020

NOTE

- 1) ALL DIMENSIONS ARE IN mm UNLESS OTHERWISE SPECIFIED
- 2) MATERIAL : COPPER PALM :- EC GRADE FORGED COPPER (COPPER PURITY 99.9%) & BARREL :- AL - EC GRADE ALUMINIUM ROD AS PER IS 5082:98 GR. 19501
- 3) FINISH : NATURAL AND DEGREASED
- 4) WELDING PROCESS : HIGH SPEED FRICTION WELDING
- 5) ALUMINIUM BARREL FILLED WITH OXIDE INHABITING COMPOUND AND SEALED BY PLASTIC CAP
- 6) TOLERANCE : ± 5%



AXIS ELECTRICAL COMPONENTS (I) P. LTD.
MUMBAI - 400067, INDIA.
TEL : 91-22-67756000
e-mail : marketing@axis-india.com



MATERIAL :
REF NOTE

DRAWN: SA
CHECKED: AG
APPROVED: KP
ISSUE DT: 18/03/11
SCALE: N.T.S.

DRG No: 2452-2011R4 C

TITLE :

**BIMETALLIC LUG
(DTL SERIES)**



CORPELIMA
Importadores y Líderes en Soluciones Eléctricas

REVISIONS			
REV #	DESCRIPTION	APPV.	REV DATE
1	PRINTING DETAIL CHANGED & MARKING DETAIL REMOVED FROM TABLE	NT	09/04/2011
2	DIMENSIONS CHANGED	NT	30/05/2011
3	ITEM CODE ADTL230012V1 & ADTL230012V2 REMOVED ITEM CODE ADTL230012 DIM. (L, L1, ØW & S) REVISED	NT	21/03/2017
4	ITEM CODE ADTL215014 AND ADTL21606 ADDED	NT	14/02/2022


CABLE SIZE mm2	ØE	ØD	Ød	L	L1	L2	ØW	S	ITEM CODE
185	10.5	32	17	117	60	70	30	6	ADTL218510
185	13	32	17	117	60	70	30	6	ADTL218512
185	17	32	17	124	60	70	35	6.5	ADTL218516
240	13	32	20	117	60	70	30	6	ADTL224012
240	14.5	32	20	124	60	70	35	6.5	ADTL224014
240	17	32	20	124	60	70	35	6.5	ADTL224016
240	21	32	20	124	60	70	35	6.5	ADTL224020
240	BL	32	20	124	60	70	35	6.5	ADTL2240BL
300	10.5	34	23.3	117	60	70	30	6	ADTL230010
300	13	34	23.3	117	60	70	30	6	ADTL230012
300	14.5	34	23.3	117	60	70	30	6	ADTL230014
300	17	34	23.3	130	62	70	36	7	ADTL230016
300	BL	34	23.3	130	62	70	36	7	ADTL2300BL
300	21	34	23.3	130	62	70	36	7	ADTL230020
400	13	40	26	160	90	100	36	8	ADTL240012
400	14.5	40	26	160	90	100	36	8	ADTL240014
400	17	40	26	160	90	100	36	8	ADTL240016
400	21	40	26	160	90	100	36	8	ADTL240020
400	BL	40	26	160	90	100	36	8	ADTL2400BL
500	13	47	29	160	90	100	36	8	ADTL250012
500	14.5	47	29	160	90	100	36	8	ADTL250014
500	17	47	29	160	90	100	36	8	ADTL250016
500	21	47	29	160	90	100	36	8	ADTL250020
500	BL	47	29	160	90	100	36	8	ADTL2500BL
630	13	47	32.5	160	90	100	50	8	ADTL263012
630	14.5	47	32.5	160	90	100	50	8	ADTL263014
630	17	47	32.5	160	90	100	50	8	ADTL263016
630	21	47	32.5	160	90	100	50	8	ADTL263020
630	BL	47	32.5	160	90	100	50	8	ADTL2630BL

NOTE

- 1) ALL DIMENSIONS ARE IN mm UNLESS OTHERWISE SPECIFIED
- 2) MATERIAL : COPPER PALM :- EC GRADE FORGED COPPER (COPPER PURITY 99.9%) & BARREL :- AL - EC GRADE ALUMINIUM ROD AS PER IS 5082:98 GR. 19501
- 3) FINISH : NATURAL AND DEGREASED
- 4) WELDING PROCESS : HIGH SPEED FRICTION WELDING
- 5) ALUMINIUM BARREL FILLED WITH OXIDE INHABITING COMPOUND AND SEALED BY PLASTIC CAP
- 6) TOLERANCE : ± 5%



AXIS ELECTRICAL COMPONENTS (I) P. LTD.
MUMBAI - 400067, INDIA.
TEL : 91-22-67756000
e-mail : marketing@axis-india.com



MATERIAL :
REF NOTE

DRAWN: SA
CHECKED: AG
APPROVED: KP
ISSUE DT: 18/03/11
SCALE: N.T.S.

DRG No: 2452-2011R4 C

TITLE :

**BIMETALLIC LUG
(DTL SERIES)**