



Conduit Bodies and Covers for General Service Locations

Description:

PROCOAT conduit bodies with covers are offered in Form 8 and Form 7 styles, each with numerous configurations to provide a complete coated conduit system. May be used to make 90° bends, for pull outlets, to provide for taps or splices, to act as a mounting outlet for wiring devices or lighting fixtures, etc. Form 8 style fittings 1/2" – 4" have an integral V-Seal gasket for superior corrosion protection. Electrical continuity of the conduit system is maintained across assembled joints.

Features:

- 40 mil gray PVC exterior coating
- 2 mil gray urethane interior coating
- 10 trade sizes from 1/2" through 4"
- Sealing sleeves on all conduit openings
- Form 7 style cover uses retained stainless screw and wedge clip design
- Form 8 style cover uses plastic encapsulated stainless steel screws with retainers built into covers for trade sizes 1/2" through 2"
- Integral V-Seal gasket on Form 8 style, sizes 1/2" through 4"

Standards:


Steel and Aluminum

- UL 514A, 514D (E231035)
- CSA C22.2 No. 18, CSA C22.2 No. 42 form 8 & Mark 9 fittings – 1/2" – 4"
- IEC IP69
- UL Type 4x

Note: Form 7 fittings are not available with encapsulated screws.

All cover screws are stainless steel.

Conduit Bodies Technical Data

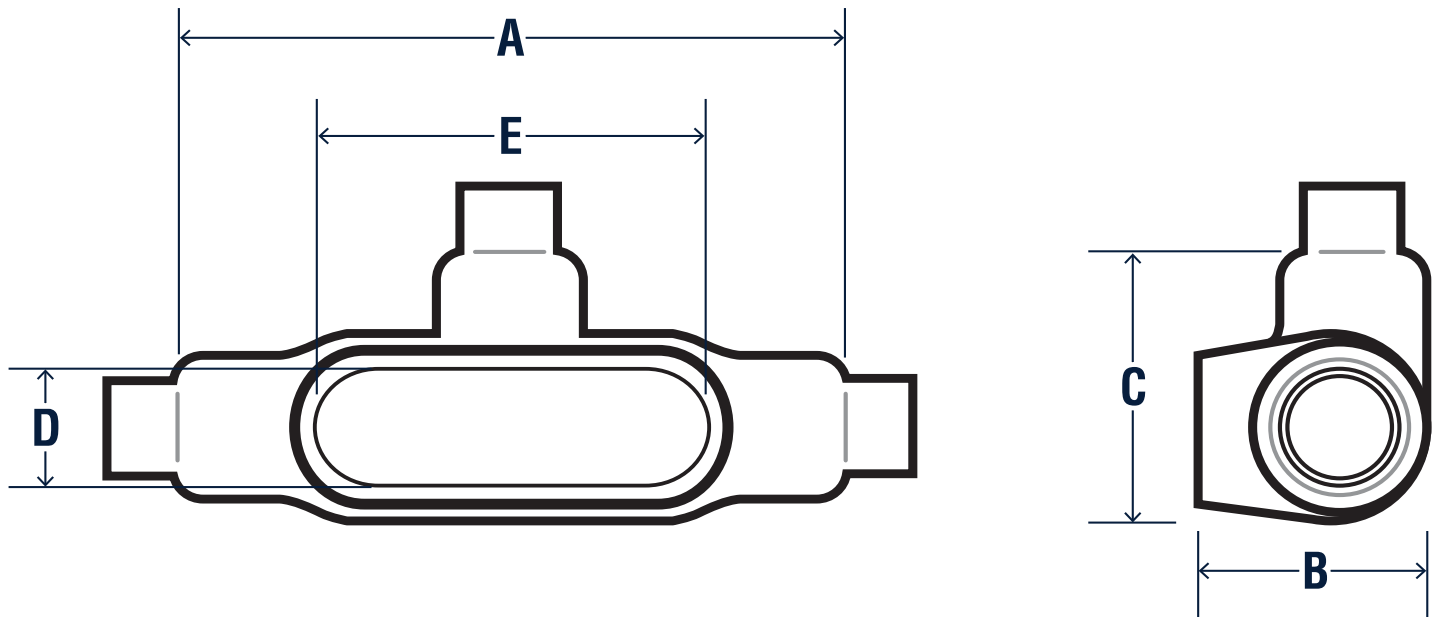

T FORM 7

PIPE SIZE	FERROUS CATALOG #	NOMINAL WEIGHT	A	B	C	D	E
1/2"	T17P	1.5	5.63	1.79	2.48	0.94	3.19
3/4"	T27P	2.1	6.25	2.04	2.67	1.13	3.81
1"	T37P	2.9	7.25	2.29	3.04	1.38	4.50
1-1/4"	T47P	3.6	7.44	2.35	3.23	1.75	5.00
1-1/2"	T57P	4.5	8.19	2.60	3.60	1.94	5.44
2"	T67P	6.5	9.19	3.17	4.17	2.44	6.38
2-1/2"	T77P	10.7	12.00	3.67	5.79	3.56	8.38
3"	T87P	15.4	12.06	4.42	5.79	3.56	8.38
3-1/2"	T97P	19.0	14.31	4.92	6.98	4.50	10.25
4"	T107P	21.0	14.31	5.42	6.98	4.50	10.25